

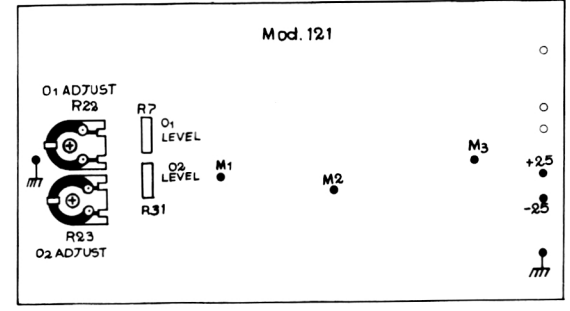
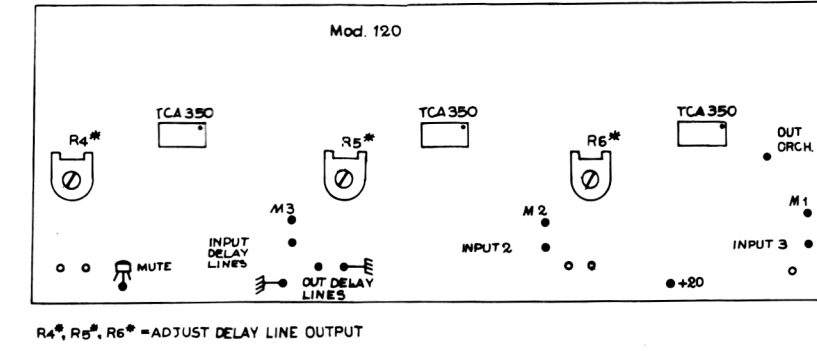
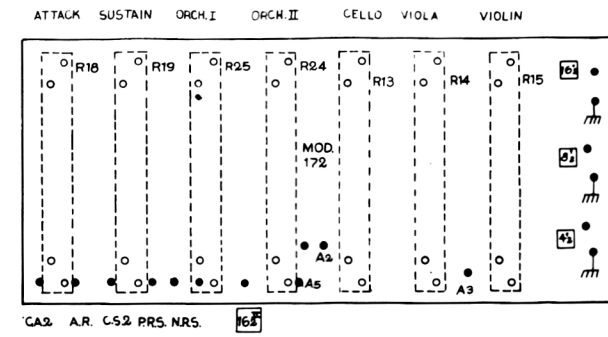
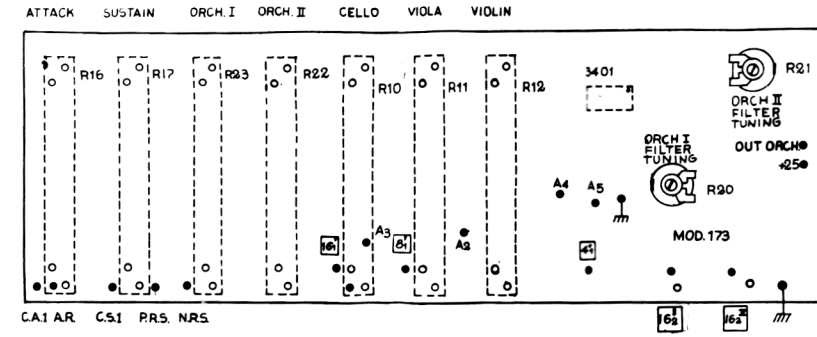
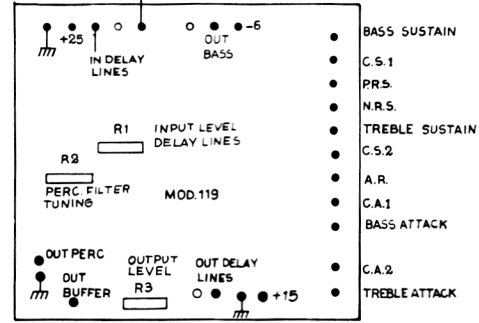
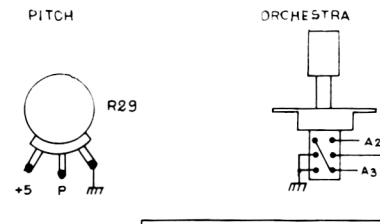
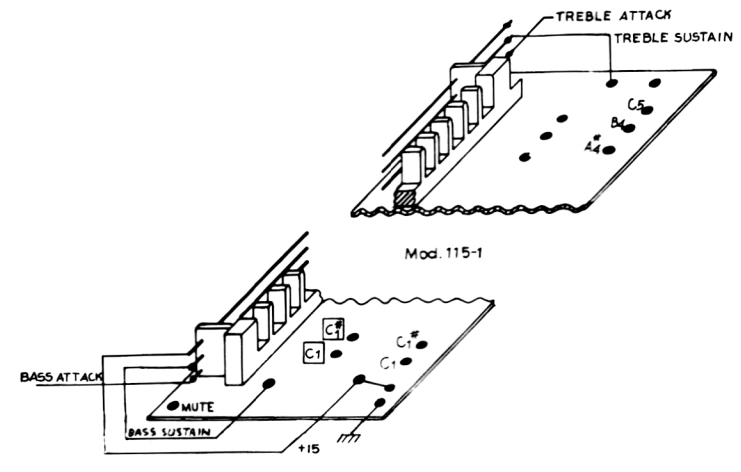
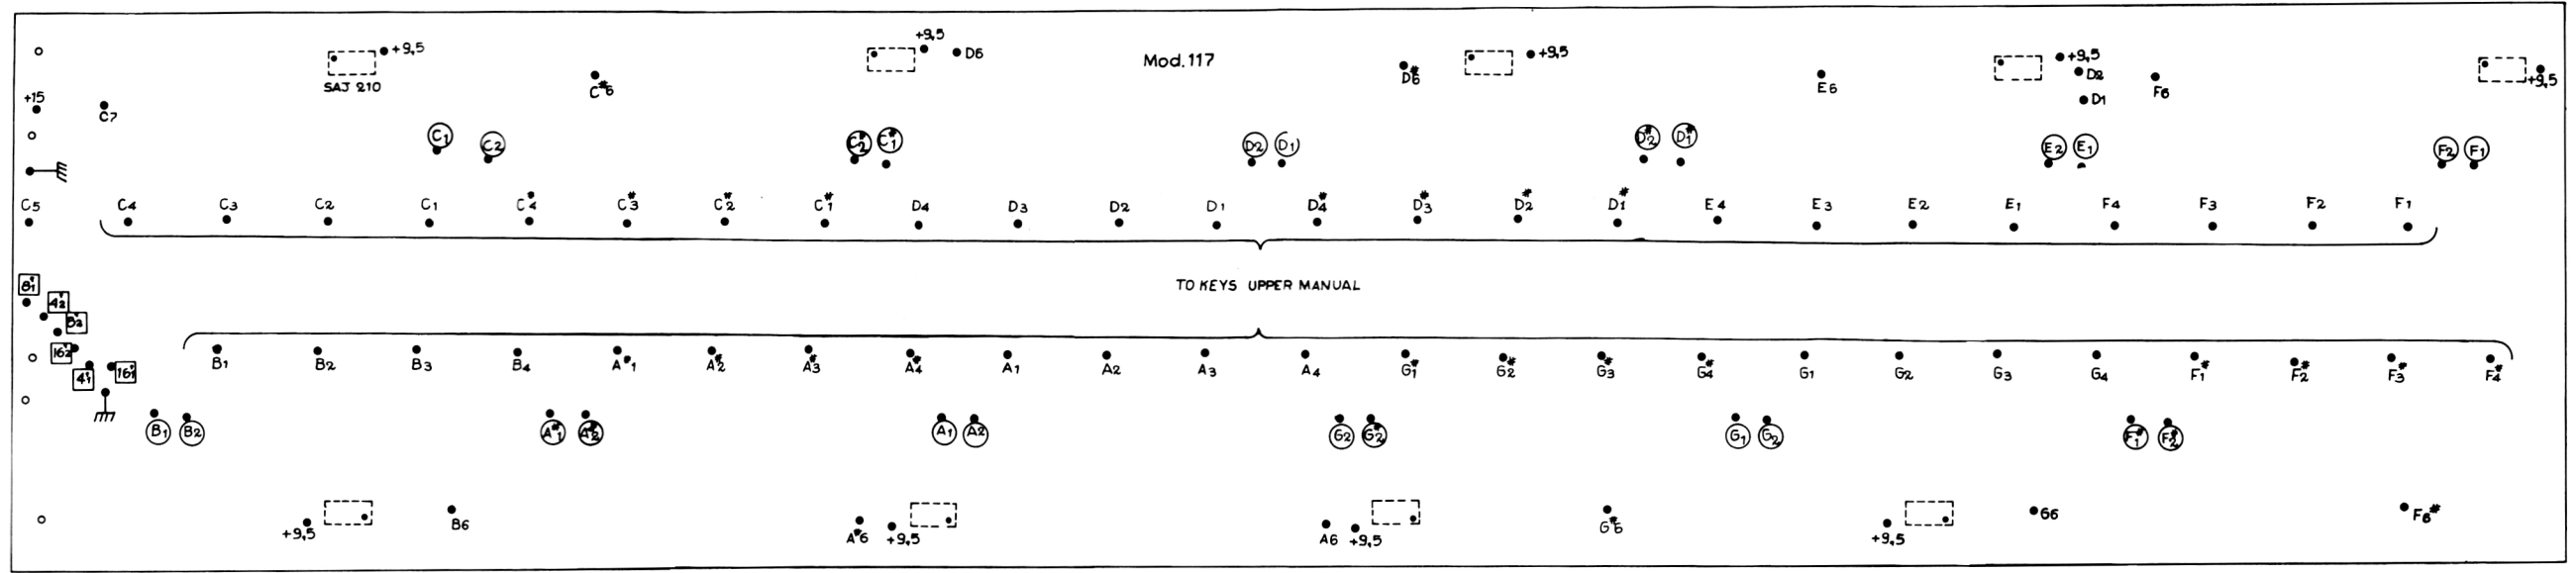
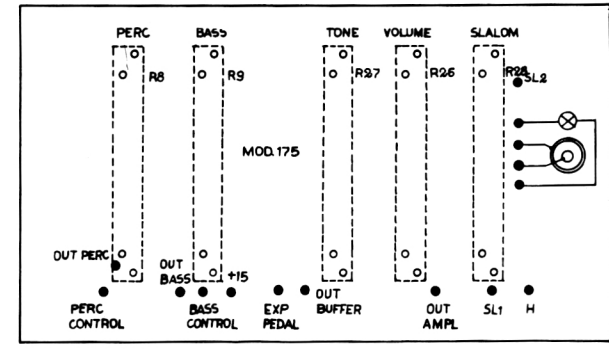
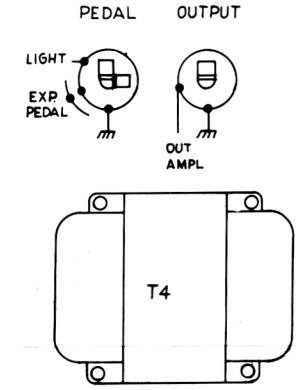
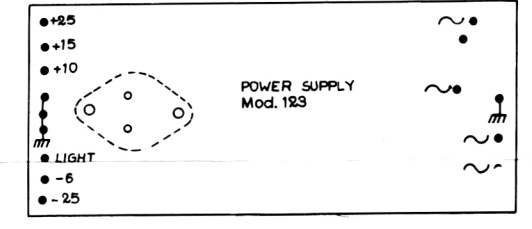


STRING ORCHESTRA

SCHEMATIC DIAGRAMS

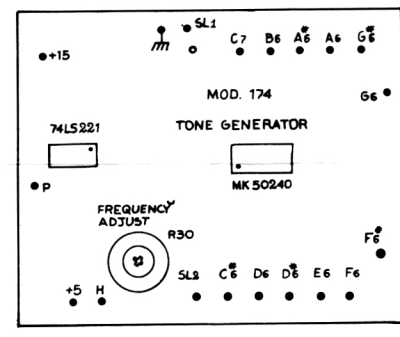


R4*, R5*, R6* = ADJUST DELAY LINE OUTPUT

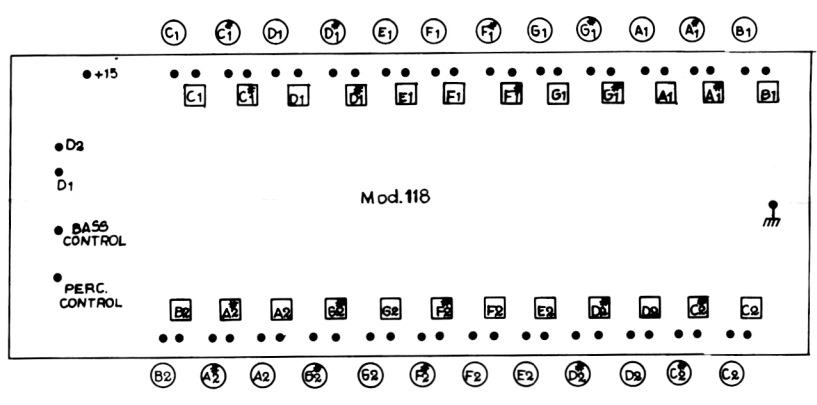

<https://www.servicemanual.altervista.org>

LC LOGAN Electronics	CODE	DATE	REVISION
	STRING ORCHESTRA	9-4-77	OF

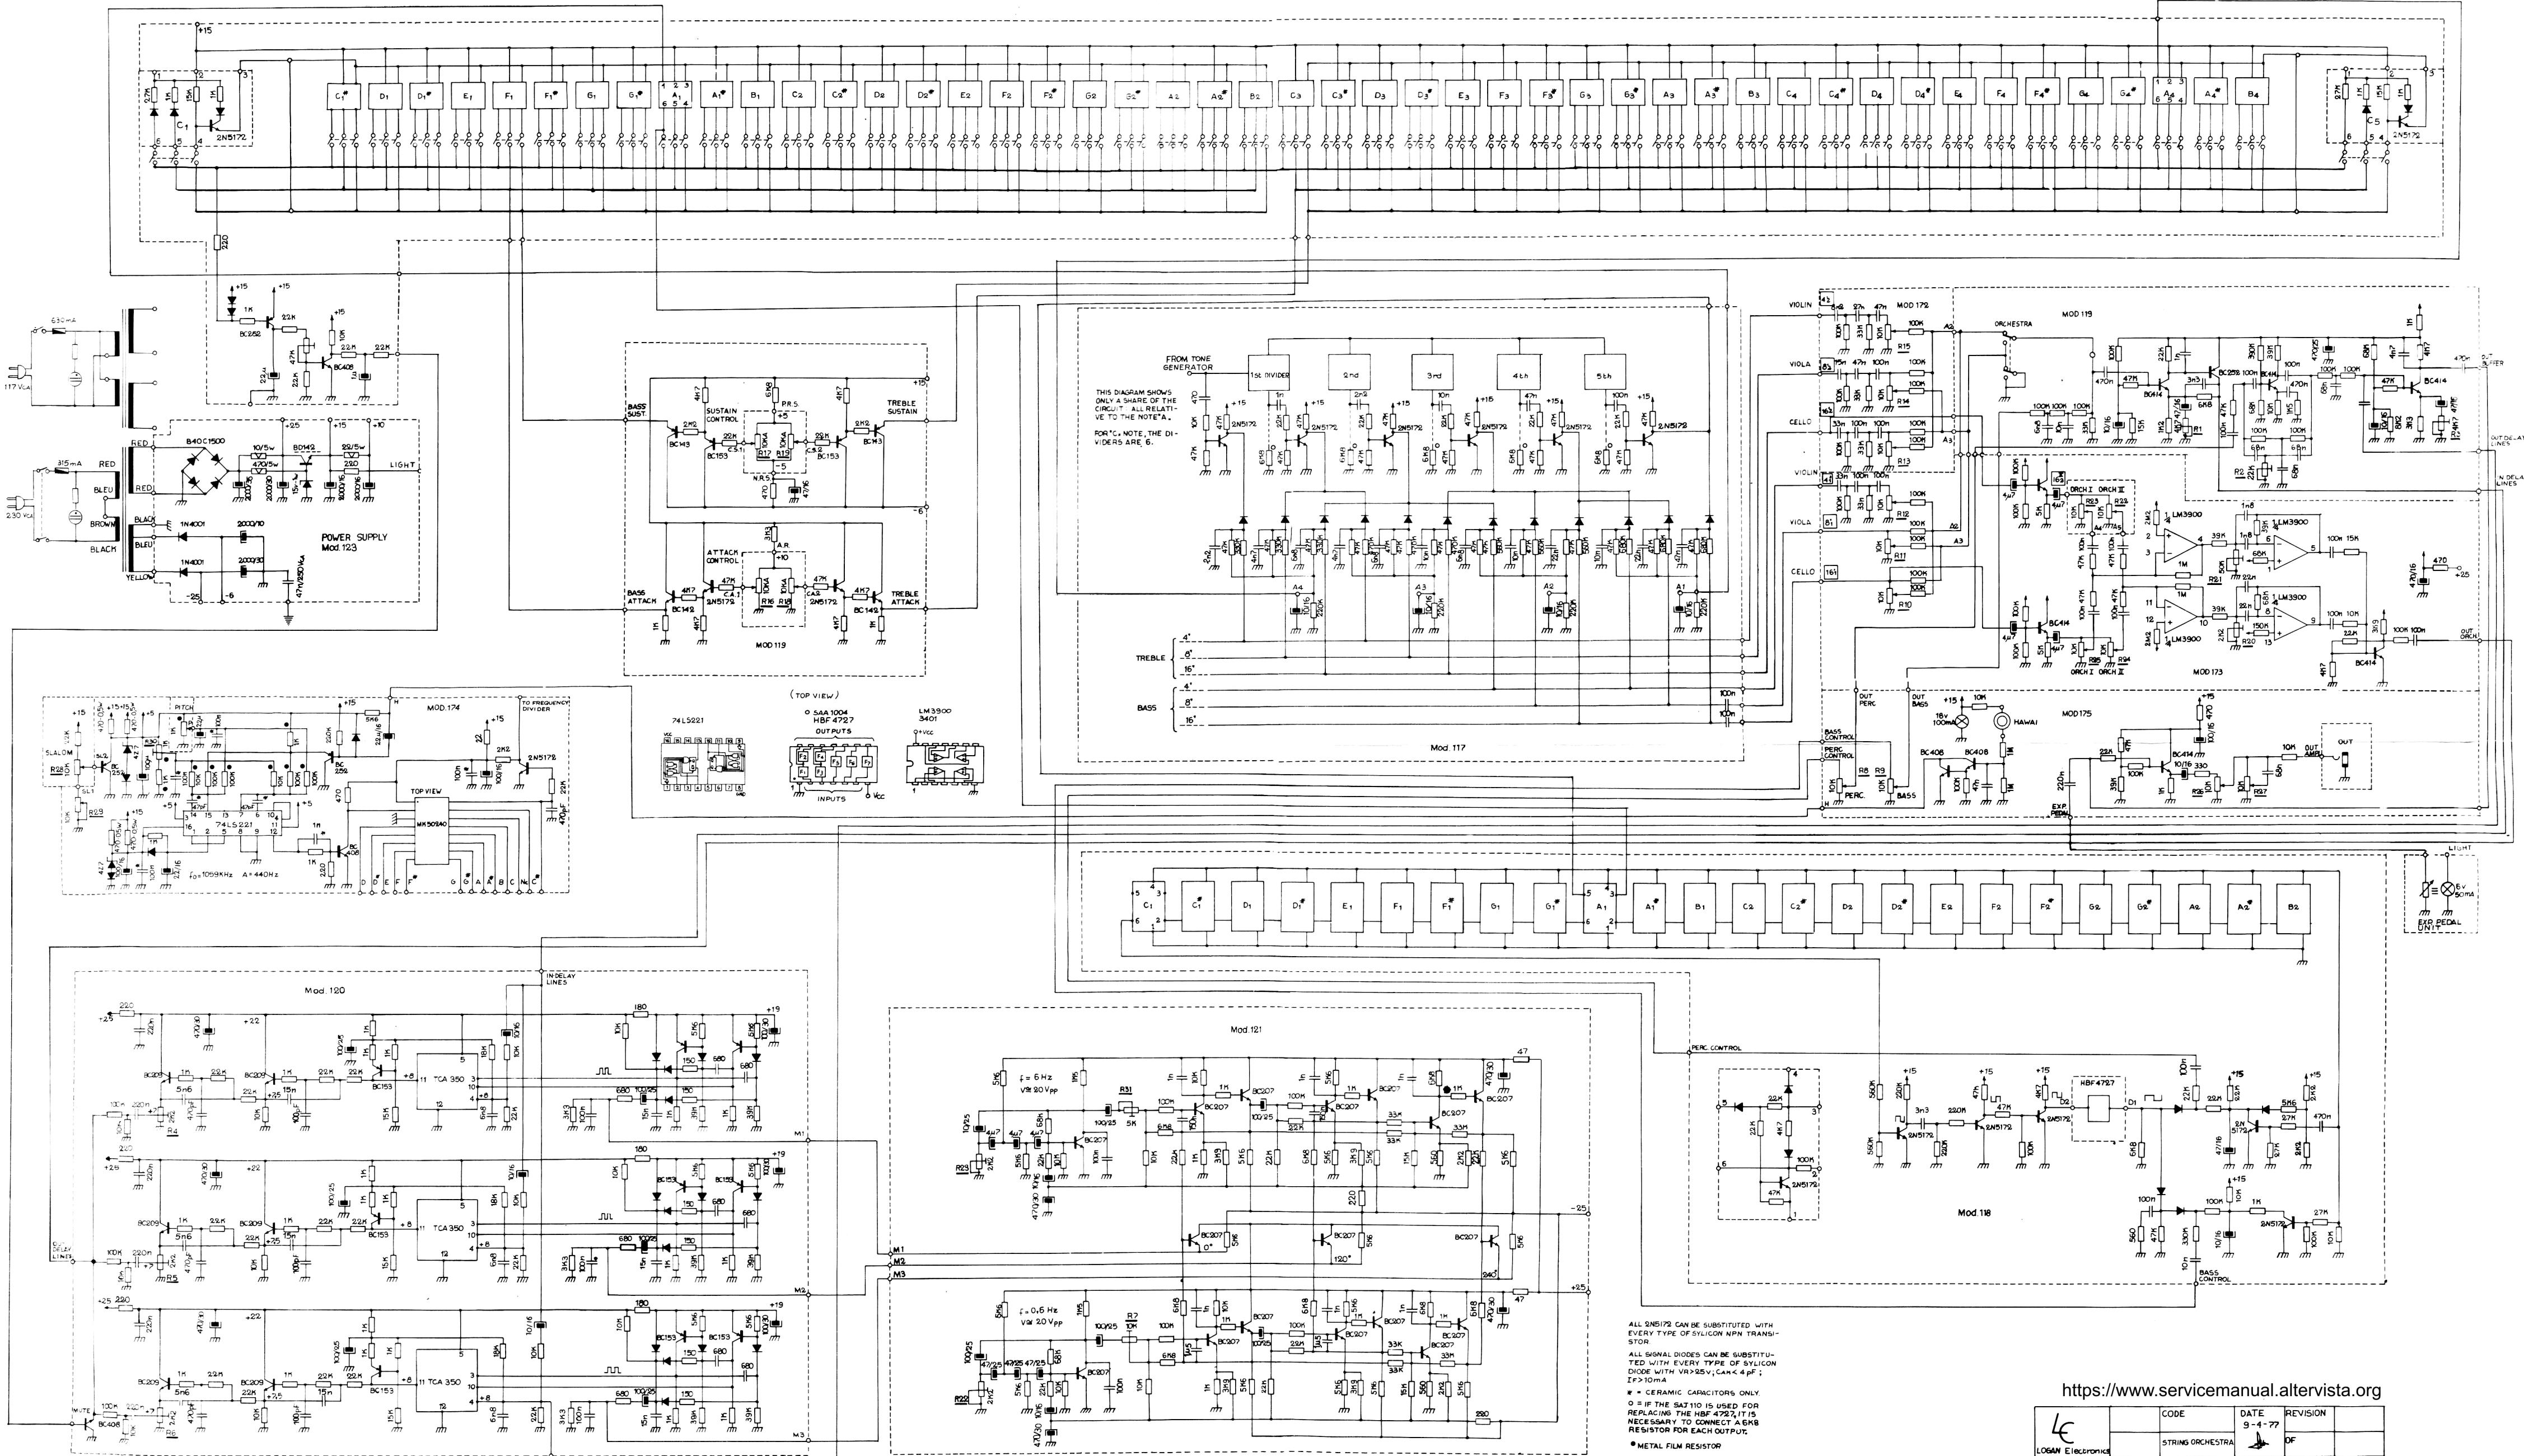

THIS DIAGRAM SHOWS ONLY A SHARE OF THE CIRCUIT. ALL RELATIVE TO THE NOTE. FOR C, NOTE THE DIVIDERS ARE 6.

ALL 2N5172 CAN BE SUBSTITUTED WITH EVERY TYPE OF SILICON NPN TRANSISTOR.
 ALL SIGNAL DIODES CAN BE SUBSTITUTED WITH EVERY TYPE OF SILICON DIODE WITH VR>25V, CAP<4pF, IF>10mA.
 * CERAMIC CAPACITORS ONLY
 O IF THE SAT110 IS USED FOR REPLACING THE HBF4727, IT IS NECESSARY TO CONNECT A 68K RESISTOR FOR EACH OUTPUT.
 * METAL FILM RESISTOR

<https://www.servicemanual.altervista.org>

LOGAN Electronics	CODE	DATE	REVISION
	STRINGS ORCHESTRA	9-4-77	DF